



SPECIFICATION SHEET

16-150V



G-TEK® POLYKOR™ BLENDED SHELL WITH POLYURETHANE COATED SMOOTH GRIP

- Seamless construction offers increased comfort and breathability
- PolyKor™ blended shell is lightweight and provides excellent dexterity, tactile sensitivity and cut resistance
- Polyurethane coated palm and fingertips for great abrasion resistance, excellent puncture resistance and outstanding wet/dry grip
- Knit Wrist helps prevent dirt and debris from entering the glove
- Color coded hems for easy size identification
- Washable, resistant to chemicals, water, and ultraviolet light

APPLICATIONS

- Electronics
- Glass cutting
- Sheet metal handling
- General duty
- Parts assembly
- Sharp small parts handling

CARE INSTRUCTIONS

Recommend washing gloves in slightly warm water not exceeding 40°C. A mild non-ionic detergent should be used. A 5-10 minute cycle time should be employed. Tumble dry on low - maximum temperature 140°F (60°C).

TECHNICAL DATA

MATERIAL	Shell: PolyKor™ / Coating: Polyurethane						
CONSTRUCTION	Seamless Knit						
COLOR	Shell: ■ Salt & Pepper / Coating: ■ Gray						
CUFF STYLE	Continuous knit						
SIZES	XS - XXXL						
PACKAGING	1 tri-folded pair per bag; 6 pair per pack; 12 packs per case (72 pair)						
CASE	16.7" x 11.2" x 11.2" / 42.5cm x 28.5cm x 28.5cm						
CASE WEIGHT	XS	S	M	L	XL	XXL	XXXL
	7.7 lbs 3.5 kg	7.9 lbs 3.6 kg	8.4 lbs 3.8 kg	8.8 lbs 4.0 kg	9.5 lbs 4.3 kg	9.9 lbs 4.5 kg	11.0 lbs 5.0 kg
COO	China						



DIMENSIONS (in/cm)


	XS	S	M	L	XL	XXL	XXXL
A	7.5 / 19	8.3 / 21.0	9.1 / 23.0	9.4 / 24.0	9.8 / 25.0	10.0 / 25.3	10.6 / 27.0
B	3.3 / 8.5	3.5 / 9.0	3.7 / 9.3	3.9 / 10.0	4.1 / 10.3	4.1 / 10.5	4.3 / 10.8
H	■ Purple	■ Red	■ Yellow	■ Brown	■ Black	■ Blue	■ Gray

PERFORMANCE PROPERTIES

EN388: 4342	ASTM F2992-15 ANSI Cut Level A2 (Adopted by ANSI/ISEA 02/16) ASTM F1790-05 ANSI Cut Level 2					
ABRASION	0	1	2	3	4	-
CUT	0	1	2	3	4	-
TEAR	0	1	2	3	4	-
PUNCTURE	0	1	2	3	4	-

BARCODES

ITEM	PAIR	PACK	CASE
■ 16-150V/XS	616314209864	01616314209863	02616314209862
■ 16-150V/S	616314209840	01616314209849	02616314209848
■ 16-150V/M	616314209833	01616314209832	02616314209831
■ 16-150V/L	616314209826	01616314209825	02616314209824
■ 16-150V/XL	616314209857	01616314209856	02616314209855
■ 16-150V/XXL	616314209871	01616314209870	02616314209879
■ 16-150V/XXXL	616314209888	01616314209887	02616314209886

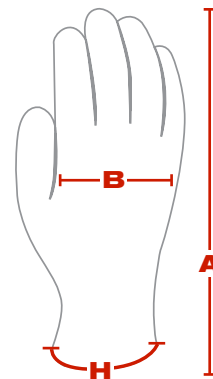

PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®

AMERICAS: (800) 262-5755 • (518) 861-0133 | EUROPE: +34-96182-41-48 | AMEA: (ASIA, MIDDLE EAST, AFRICA) 852-2475-9228 | www.pipglobal.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.